



FIREPLACE INSERTS

DUAL FUEL
HIGH EFFICIENCY WOOD & GAS

Fuego Flame's Inserts are highly efficient and have the flexibility to flushmount or be recessed and fit most fireplace openings...



Features:

- Heat output up to 50,000 BTU's per hour
- Heats up to 3,000 square feet
- Fingertip damper control
- Damper closes completely when not in use & operates up to 95% closed with little or no heat up the chimney
- No electricity needed...good source of emergency heat
- Natural convection circulates heat up to 250 cfm
- Highest heat output without an electric blower
- Higher heat output than most fireplaces with electric blowers
- Hand welded firebox
- Ceramic glass doors withstand heat up to 1400 °
- Solid heavy 12 gauge steel construction for durability and high temperatures
- 20 Year Limited Warranty

Versatile

With a Fuego Flame Insert, you can maintain your fireplace's beauty and improve its heat efficiency. The Fuego Flame Inserts are available in four different sizes that install recessed or flush with the front of your existing masonry fireplace. They fit in most standard fireplaces, arched fireplaces, stone fireplaces, curved fireplaces and even unusual shaped fireplaces.

Dual Fuel

Dual fuel and convertible... our Inserts can burn wood or can be converted to gas burning. For ease of starting your fire, it can be used easily with a gas starter.

High Efficiency

The key to a Fuego's efficiency lies in the unique design and adjustable damper that provides the proper air-flow without the use of noisy and expensive blowers. With the damper 95% closed, the air flow is controlled to provide ultimate burning conditions reaching heat levels between 900 and 1200 degrees. With the ceramic glass doors closed, this clean wood burning fireplace reduces smoke emissions and helps you save on fuel...You burn less wood, spend less time "fetchin," remove ashes less frequently and pay lower fuel bills.

Natural Convection

With your comfort in mind, our engineers designed the fireplace for optimum operation for the highest heat output without the use of electricity. The Fuego Flame Insert's natural convection design puts the heat in the room where it belongs.

“When the power goes out you don't have to worry about heat. The Fuego produces powerful heat with no electricity.”

For additional styling...

The decorative gold accents are 24 karat gold plated to withstand the high heat output. The "cool to the touch" wood handles come natural so that they can be painted black or stained to match your decor.



BLACK UNIT



GOLD FRAME UNIT WITH BLACK DOORS



BLACK UNIT WITH GOLD DOORS




BLACK UNIT WITH GOLD DOORS & DECORATIVE GOLD TRIM



GOLD FRAME UNIT WITH GOLD DOORS

The Fuego Insert's positive flue connection sealing plate insures a tight seal and prevents dirt and smoke from re-entering firebox. It uses minimal air consumption similar to an air tight stove. Uses less air in one day than a conventional fireplace uses in an hour

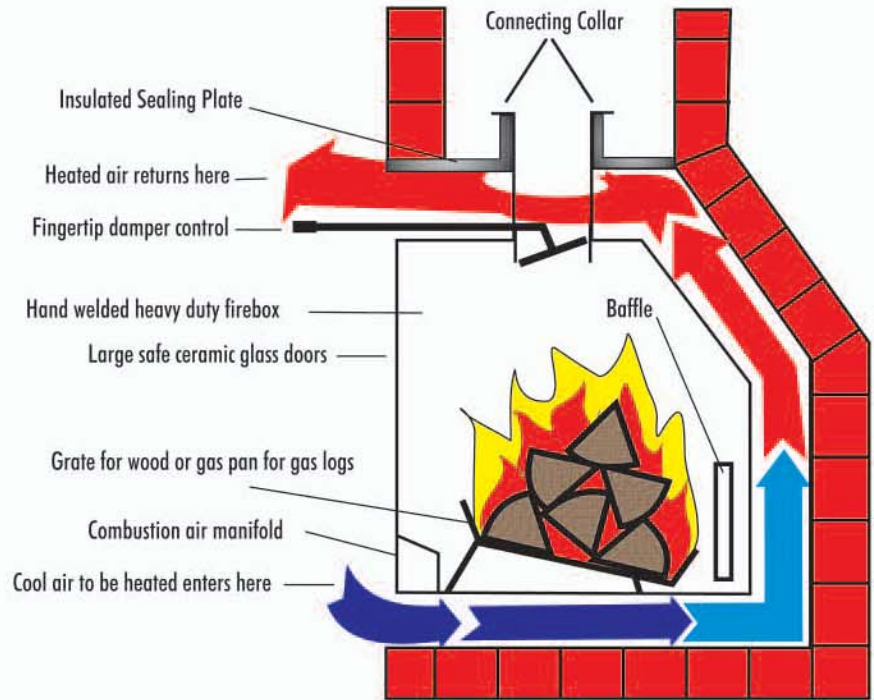


| | |
|--|--|
| TYPE: | Dual Fuel - Wood or Gas Burning |
| STYLE: | Insert |
| FRAMING DIMENSIONS: MODEL A MODEL B MODEL C MODEL D | 37-3/4" Wide x 24" High x 18-1/2" Deep 29-3/4" Wide x 24" High x 18-1/2" Deep 32-3/4" Wide x 20" High x 17-1/2" Deep 27-3/4" Wide x 20" High x 17-1/2" Deep |
| CERAMIC GLASS DOORS: MODEL A MODEL B MODEL C MODEL D | PER DOOR SIZE 16" Wide x 19" High 12" Wide x 19" High 13 11/2" Wide x 15" High 11" Wide x 15" High |
| INCLUDED: | Grate for wood or Gas Pan for gas logs Removable Temperature gauge Installation Kit |
| OPTIONAL: | Multiple Decorative 24 Karat Gold Plated Trim |
| FLUE SIZE: | 8" (Requires Class A all fuel pipe) |
| WARRANTY: | 20 Years |
| SHIPPING WEIGHTS: MODEL A MODEL B MODEL C MODEL D | 150 lbs. 135 lbs. 140 lbs. 130 lbs. |

The Fuego Flame difference...

The Fuego Flame Insert uses only one third the wood compared to conventional fireplaces, provides up to 50,000 BTU's per hour of heat, and returns up to 250 cubic feet per minute of heat through its built-in natural convection system. There is no need for electricity. When its flue is closed up to 95 percent, little or no heat is lost up the chimney. All the heat goes into your room.

The Fuego Flame Fireplace Inserts are versatile and can be flush mounted to most fireplace opening...rectangle, arched, curved, unusual shaped and even irregular stone faced fireplaces. Measure the width, highest center point and depth. Then refer to the sizing chart for the proper fit.

| | ACTUAL INSERT SIZES | | | MINIMUM FIREPLACE OPENING | | |
|----------|---------------------|--------|---------|---------------------------|--------|-------|
| | Width | Height | Depth | Width | Height | Depth |
| A | 37 3/4" | 24" | 18 1/2" | 40" | 27" | 21" |
| B | 29 3/4" | 24" | 18 1/2" | 32" | 27" | 21" |
| C | 32 3/4" | 20" | 17 1/2" | 35" | 23" | 20" |
| D | 27 3/4" | 20" | 17 1/2" | 30" | 23" | 20" |

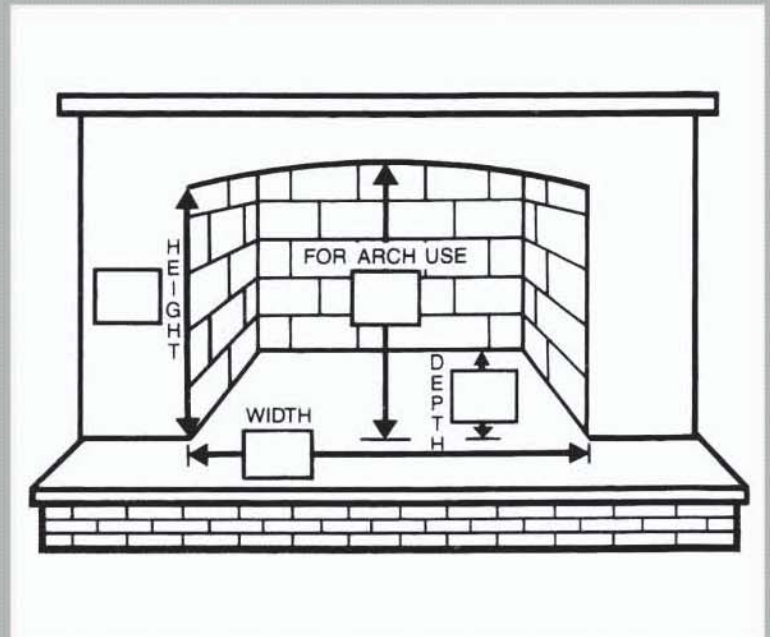

Fuego Flame Fireplaces are exempt from EPA Emission requirements.

All Fuego Flame Zero Clearance Fireplaces are tested to ANSI/UL 127 & HUD specifications, approved for use in mobile homes with Fuego Flame Fireplaces' Outside Air Kit. Our Inserts are tested and approved to UL 917 for use in all masonry fireplaces built in accordance with the Uniform Building Code.

Please contact your local building and/or fire officials about restrictions and installation inspection in your geographic area.



Fuego Flame Sales
 3605 Woodhead Drive, Ste.106
 Northbrook, Illinois 60062
 p. 1.800.445.1867
 f. 847.480.7804
 Email: info@fuegoflame.com
www.fuegoflame.com

For complete details on Fuego Flame Fireplaces please contact us at...